


AQUAMAX Eco PLUS PREMIUM

Efficient water movement in multiple pond zones

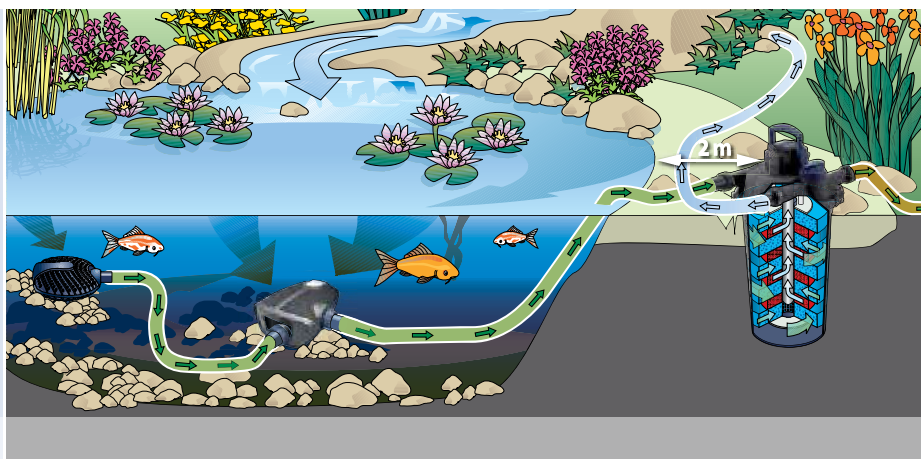

- Plant remains or fish waste up to 11 mm in size are displaced
- Outstanding energy balance: reliable displacement using even less energy
- Supplemental, patented connection of optional filter accessories for debris supply from more distant pond zones
- Unique, patented frost protection: the pump will not be damaged at temperatures down to -20° C
- Flow rate can be adjusted mechanically or electronically using an external controller
- Elegant design with clever operating components
- Quiet when set up dry on swim ponds and bathing ponds
- »Environmental Function Control« (EFC by OASE) protects against dry run and blocking

PRO



Extras

For use in swim ponds

The AquaMax Eco Premium is suitable with safe 12V technology for implementation in swim ponds and bathing ponds!

6000/12 V Item no. 50730
12000/12 V Item no. 50382

From AquaMax Eco Premium 12000

- Patented »Seasonal Flow Control« for intelligent and environmentally-conscious regulation of flow rate and delivery head

Matching filters and filter systems starting on page 34

	AquaMax Eco Premium 4000	AquaMax Eco Premium 6000	AquaMax Eco Premium 8000	AquaMax Eco Premium 10000	AquaMax Eco Premium 12000	AquaMax Eco Premium 16000	AquaMax Eco Premium 20000
Dimensions (L x W x H)	mm 340 x 280 x 165						
Rated voltage	220 - 240 V / 50/60 Hz						
Power consumption	W 10 - 35	12 - 45	15 - 60	19 - 88	10 - 110	11 - 145	15 - 180
Guarantee (+ request guarantee) ^{pp.173}	Years 3 + 2						
Max. flow rate	l/h 4000	6000	8000	10000	12000	15600	19500
Max. head height, metres	m 3.30	3.70	4.10	4.70	5.00	5.20	5.40
Hose connection	mm (inch) 25 / 32 / 38 (1", 1 ¼", 1 ½")		25 / 32 / 38 / 50 (1", 1 ¼", 1 ½", 2")				
Filter intake surface	cm² 1000						
Max. coarse debris displacement	mm 10					11	
Setup type	Can be setup underwater & dry installed						
Item no. (GB-Version)	50735	50739	50741	51085	50743	50746	56409
Item no.	50734	50736	50740	51078	50742	50745	56406